



VICTORY MICROWAVE CORPORATION

Transmit Antenna With Pedestal

Part Number: 6727A000-1



Specification:


1. Frequency : 2 ~ 8 GHz
2. Insertion Loss: ≤ 1.2 dB
3. VSWR : $\leq 2:1$
4. Gain: ≥ 20 dBi
4. RF input power: 600 W $\pm 1\%$

Victory Microwave Corporation
No. 396, Fude 1st Rd.
Xizhi Dist., New Taipei City 22150
Taiwan (R.O.C)

Tel : +8862-8693-3799
Fax: +8862-8693-3798
Email: micsales@vicmic.com.tw
Website: www.vicmic.com.tw



VICTORY MICROWAVE CORPORATION

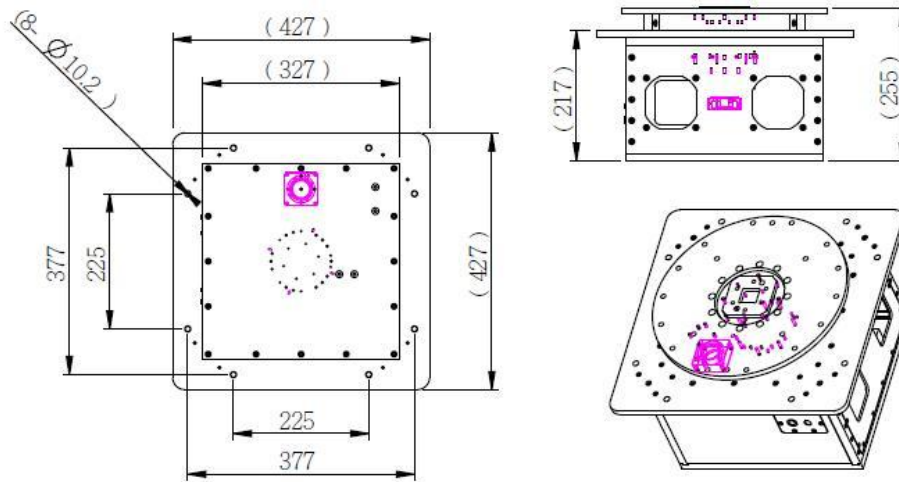

方位角馬達動作訊息 (S2)

輸入方位角馬達的連線IP值
S2 IP位址: 192.168.1.51
S2 連線 S2 中斷連線

輸入方位角馬達的轉速
S2 速度: 6 RPM
S2 加速度: 60 REV / Sec²

更改設定方位角馬達的IP值

預設方位角馬達的歸零、Offset值
S2 的 Offset 值: 0 度
S2 啟動時歸零: 否

預設方位角馬達的測試動作
在 S2 中儲存測試資料 清除 S2 中的測試資料

狀態 使用者: ADMIN

Pedestal Specification:

1. Single Axis Pedestal
2. Input Power : DC48V 5A
3. Speed(Max) : 10RPM
4. AZ Rotation angle : 0~360° (Continuous)
5. Loading Capacity : 75kg
6. Cooling : Fan
7. Operation temperature : 0~50°C
8. SIZE(L*W*H) : 427mm*427mm*255mm
9. Control Interface : Ethernet

Victory Microwave Corporation
No. 396, Fude 1st Rd.
Xizhi Dist., New Taipei City 22150
Taiwan (R.O.C)

Tel : +8862-8693-3799
Fax: +8862-8693-3798
Email: micsales@vicmic.com.tw
Website: www.vicmic.com.tw