




Can Be Designed and Manufactured  
to Customer Specifications

## Circulators

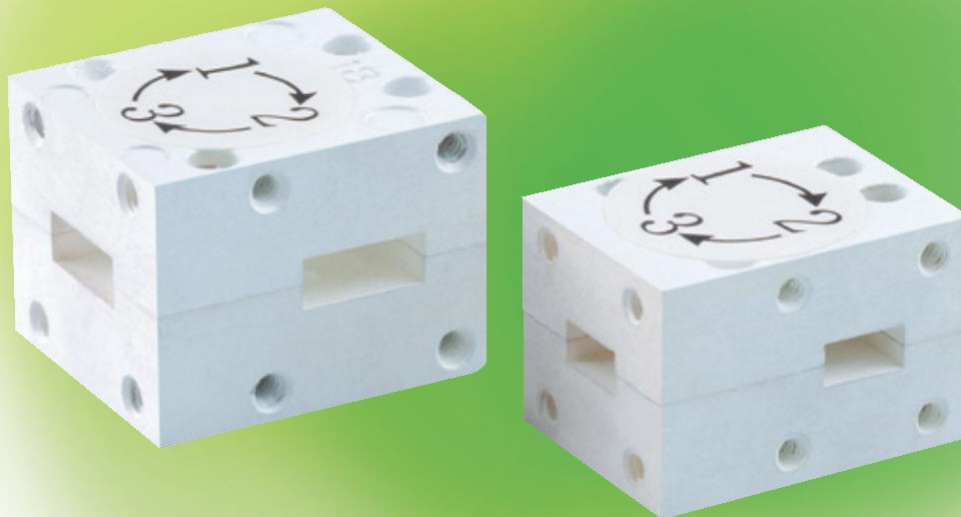

### Features

- Low insertion loss and high isolation
- Designed for wide band applications



### TECHNICAL SPECIFICATIONS:

W/G Flange	Frequency (GHz)	Return Loss (db)	Insertion Loss (db)	Isolation (db)
WR42	17.7-19.7	20	0.2	20
WR42	21.2-23.6	20	0.2	20
WR42	24.2-26.53	20	0.2	20
WR28	37-40	20	0.2	20

### WR42 Circulator (24.2-26.53 GHz)

